

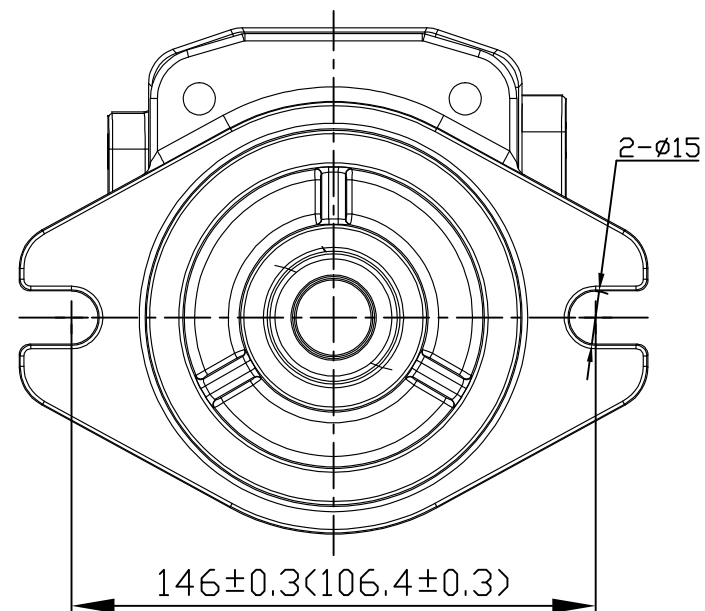


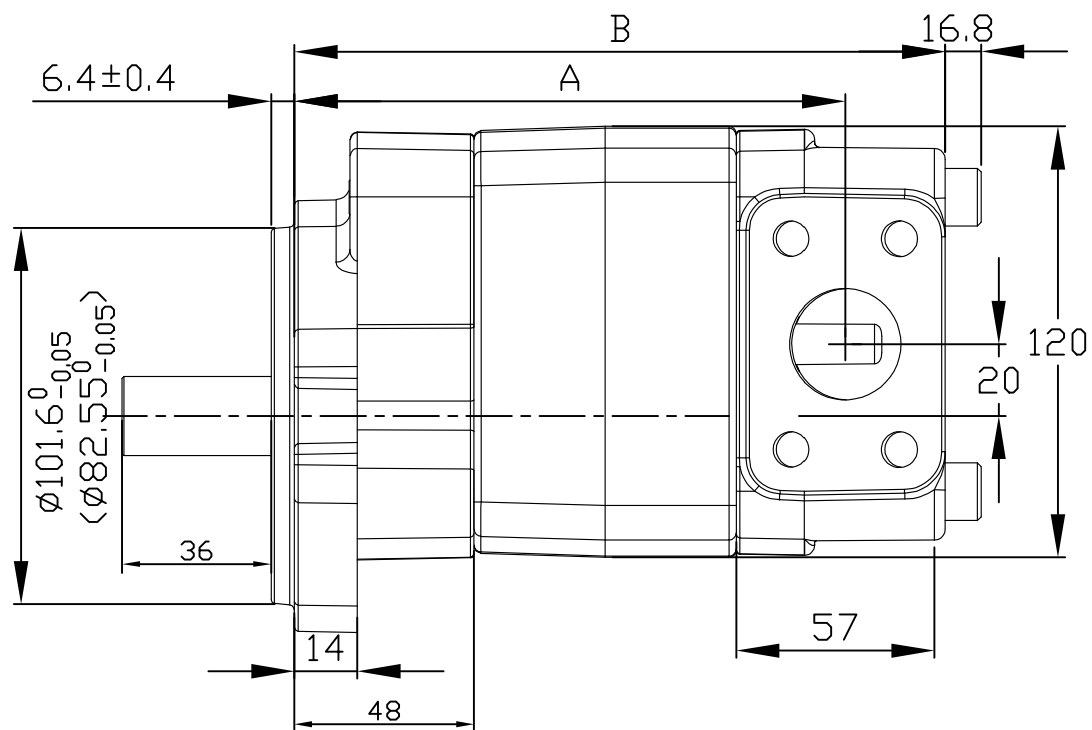

前蓋有兩種SIZE



	出口尺寸	入口尺寸
D	25	31
E	26.2±0.25	30.2±0.25
F	52.4±0.25	58.7±0.25

Model	Displacement	Working	Max Pressure	Speed(rpm)		A	B	Weight
	Capacity cm ³ /rev	Pressure kg/cm ² (psi)	kg/cm ² (psi)	Loaded	Unloaded	(m/m)	(m/m)	kg
HGP-4A F20 ^{R/L}	20	250(3500)	300(4200)	600	3000	108.5	137	4.1
HGP-4A F23 ^{R/L}	22.5	250(3500)	300(4200)	600	3000	110.5	139	4.6
HGP-4A F25 ^{R/L}	25	250(3500)	300(4200)	600	3000	113.5	142	5.1
HGP-4A F28 ^{R/L}	28	250(3500)	300(4200)	600	3000	116.5	145	5.7
HGP-4A F32 ^{R/L}	31.5	250(3500)	300(4200)	600	3000	121.5	150	6.4
HGP-4A F36 ^{R/L}	35.5	210(3000)	300(4200)	600	3000	123.5	152	7.1
HGP-4A F40 ^{R/L}	40	210(3000)	300(4200)	600	3000	128.5	157	8
HGP-4A F45 ^{R/L}	45	210(3000)	300(4200)	600	2600	133.5	162	8.8
HGP-4A F50 ^{R/L}	50	175(2500)	210(3000)	600	2500	138.5	167	9.7
HGP-4A F56 ^{R/L}	55	175(2500)	210(3000)	600	2400	142.5	171	10.7
HGP-4A F60 ^{R/L}	60	140(2000)	175(2500)	600	2000	147.5	176	11.8
HGP-4A F70 ^{R/L}	70	125(1800)	140(2000)	600	2000	156.5	185	13.1

TITLE:

HGP-4A

SIZE	DWG. NO.	REV
SCALE: 1:5	WEIGHT:	SHEET 1 OF 1