


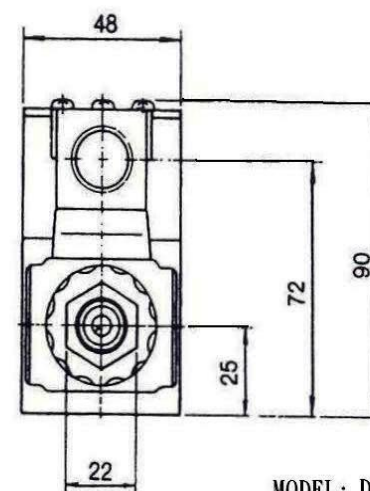
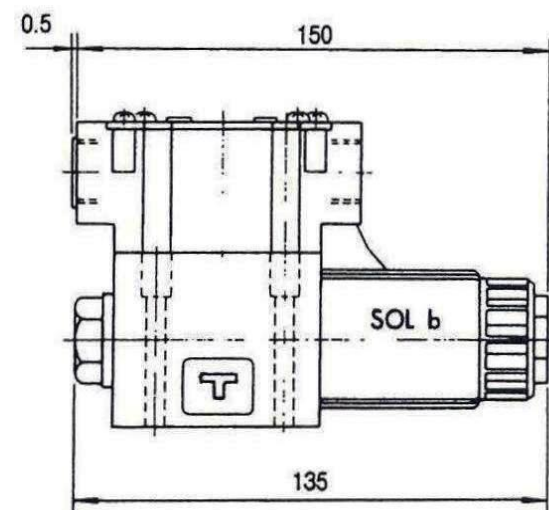
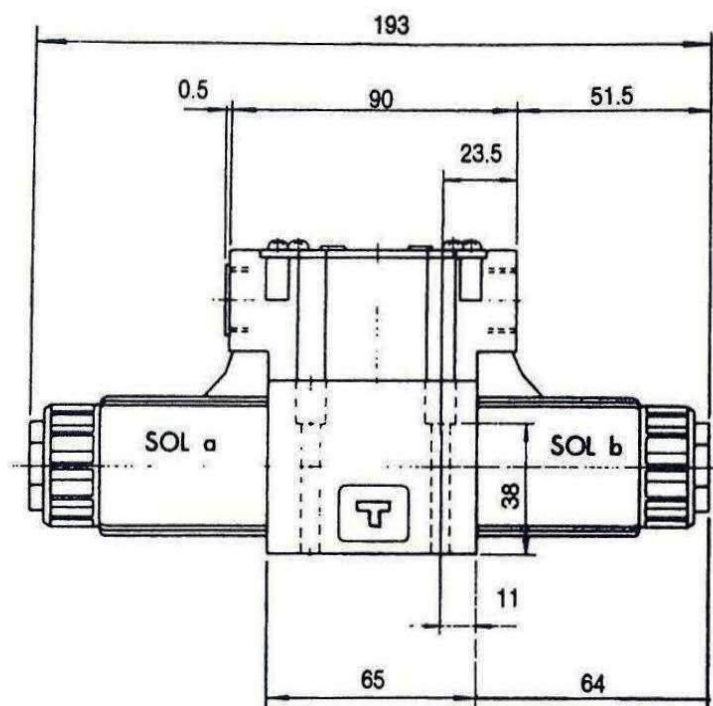
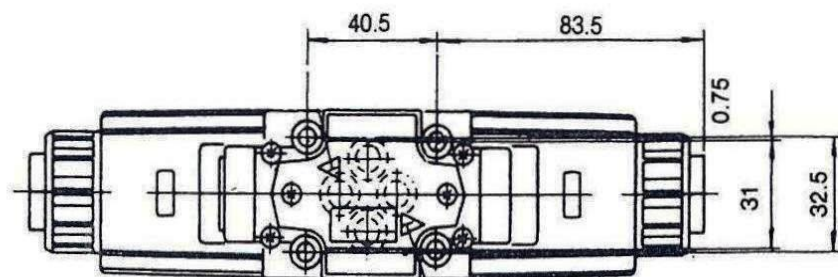
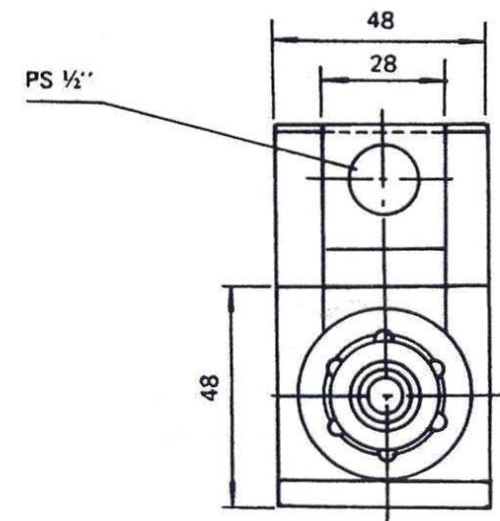
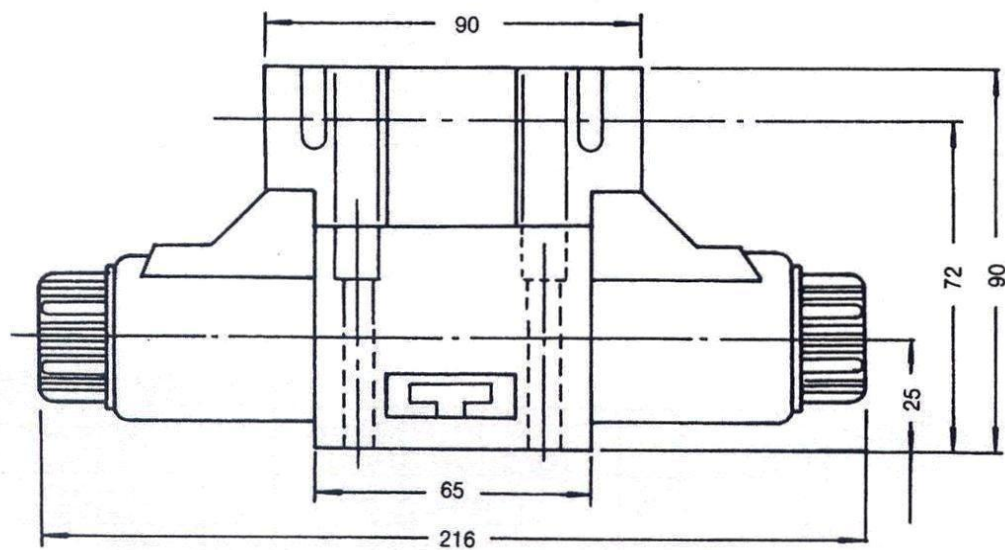
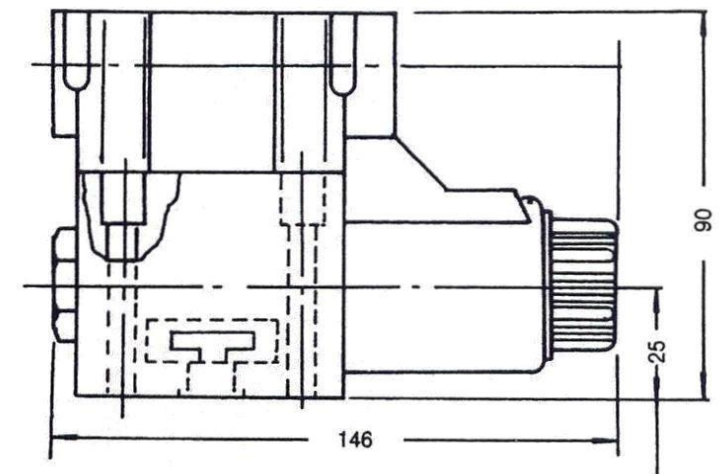
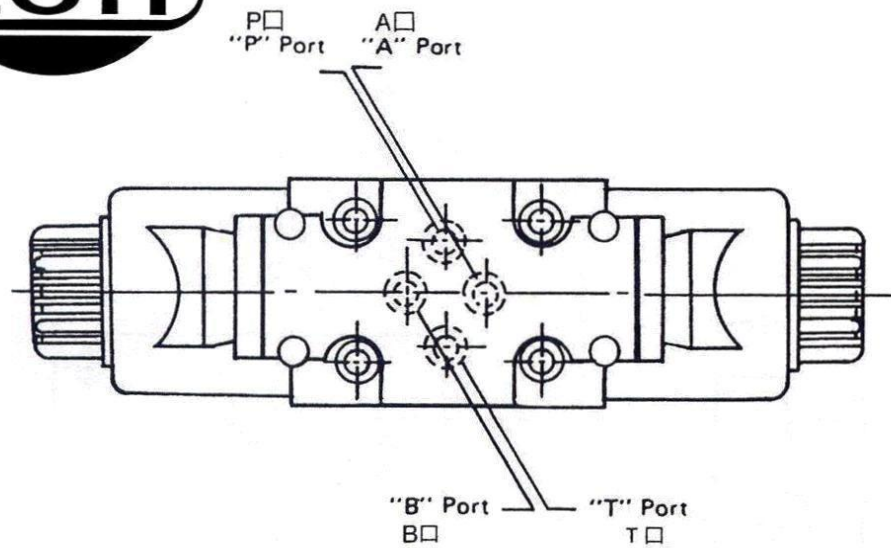


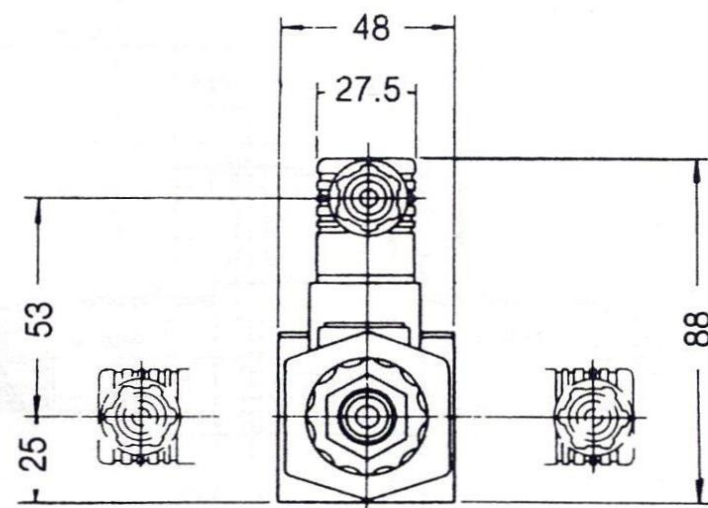


MODEL: DSG-\*\*\*-02-A\*-10  
單位:mm Unit:mm

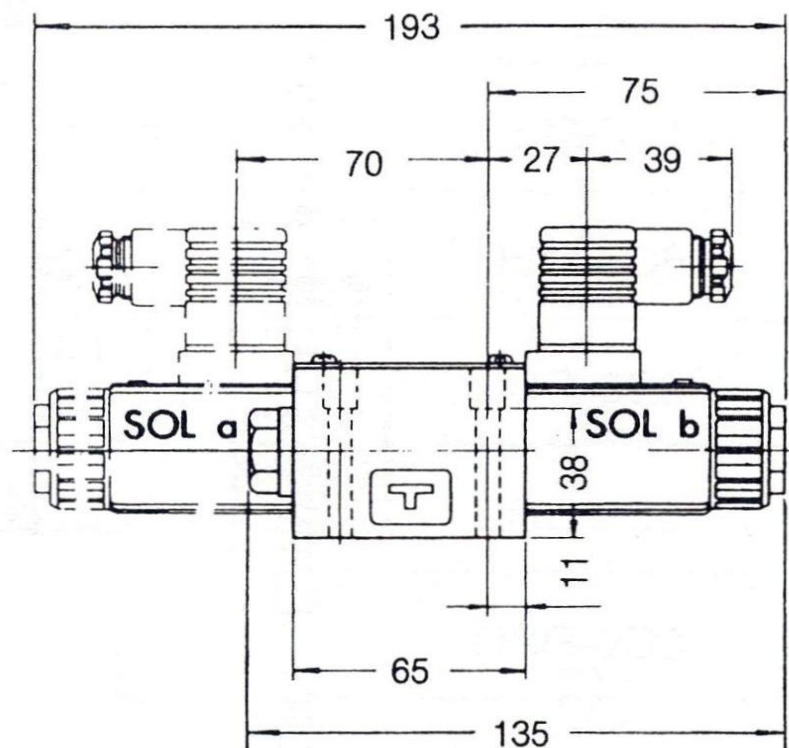



MODEL: DSG-\*\*\*-02-D\*-10  
單位:mm Unit:mm


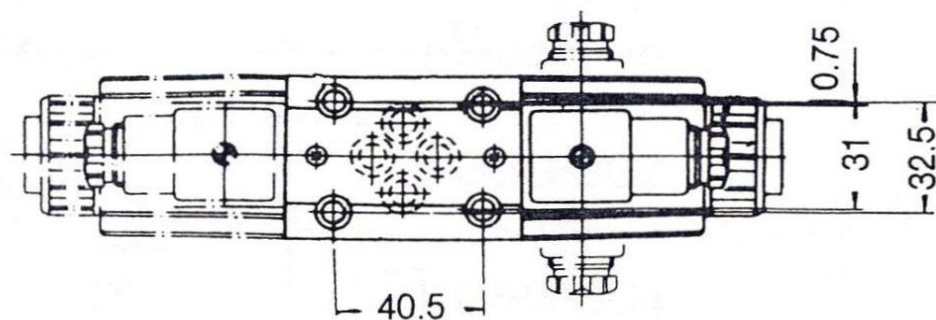


MODEL: DSG-\*\*\*-N-02-A\*  
單位:mm Unit:mm

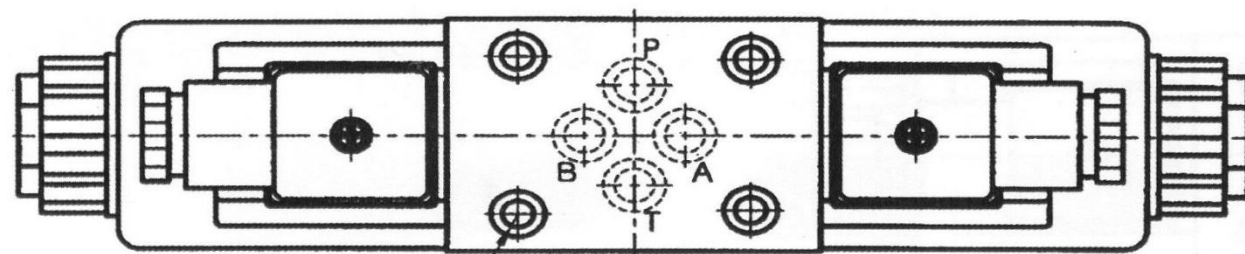

4- $\varnothing 5.5(0.22)$  Hole Thru  
 $\varnothing 9.5(0.35)$  C'bore

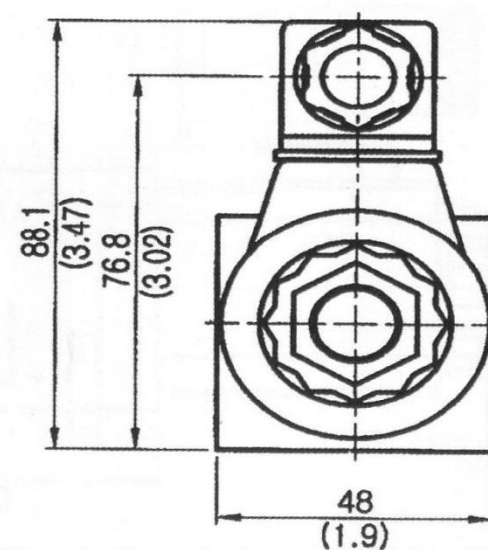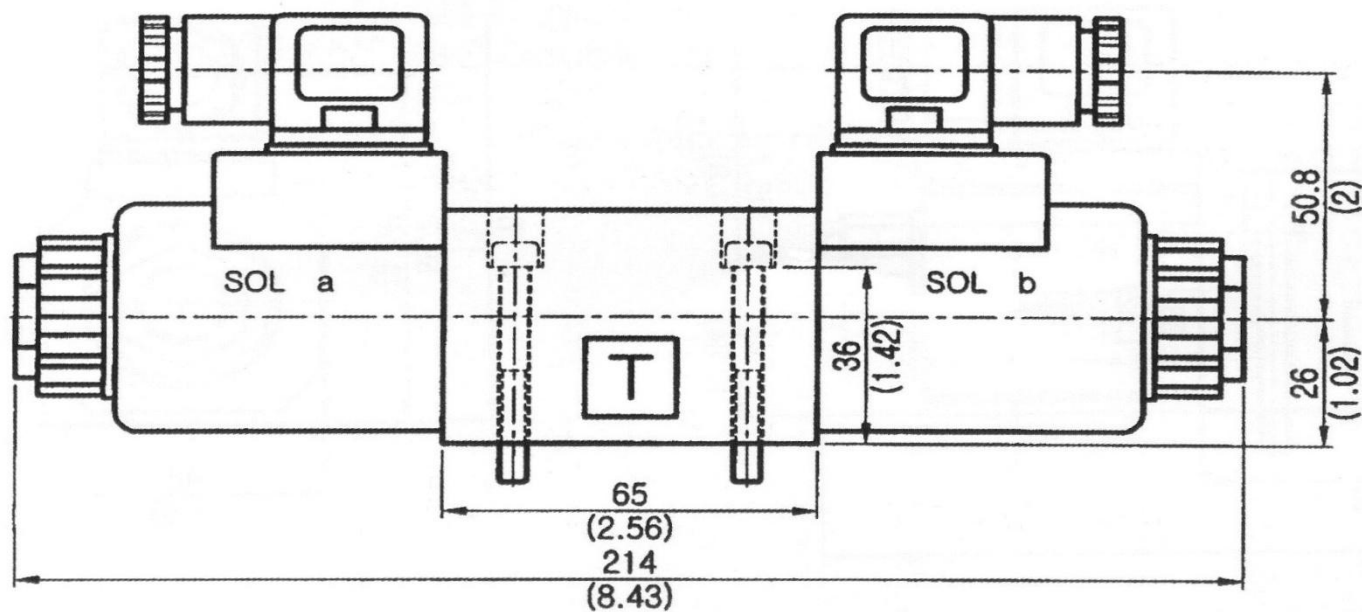

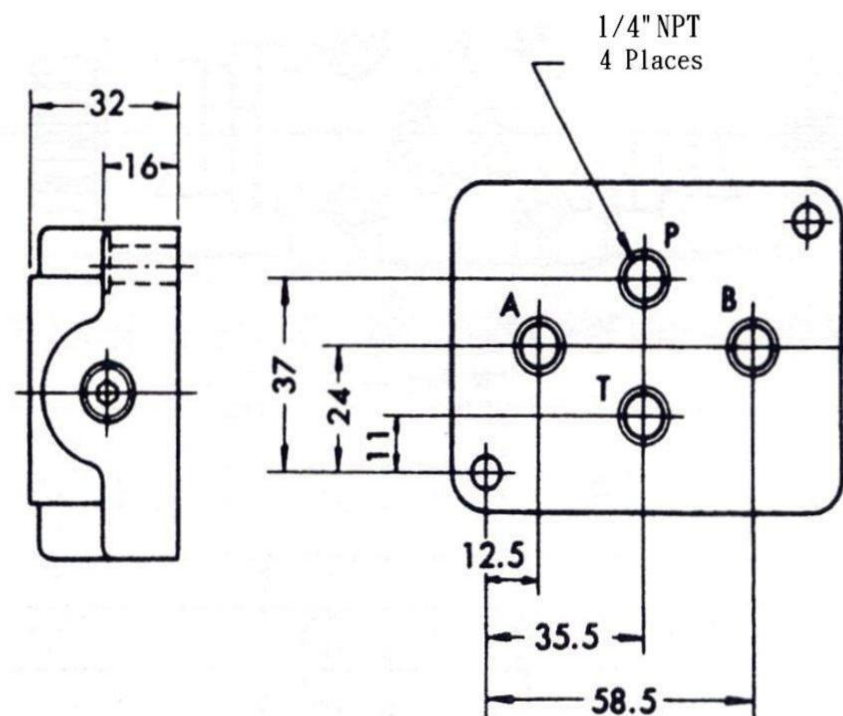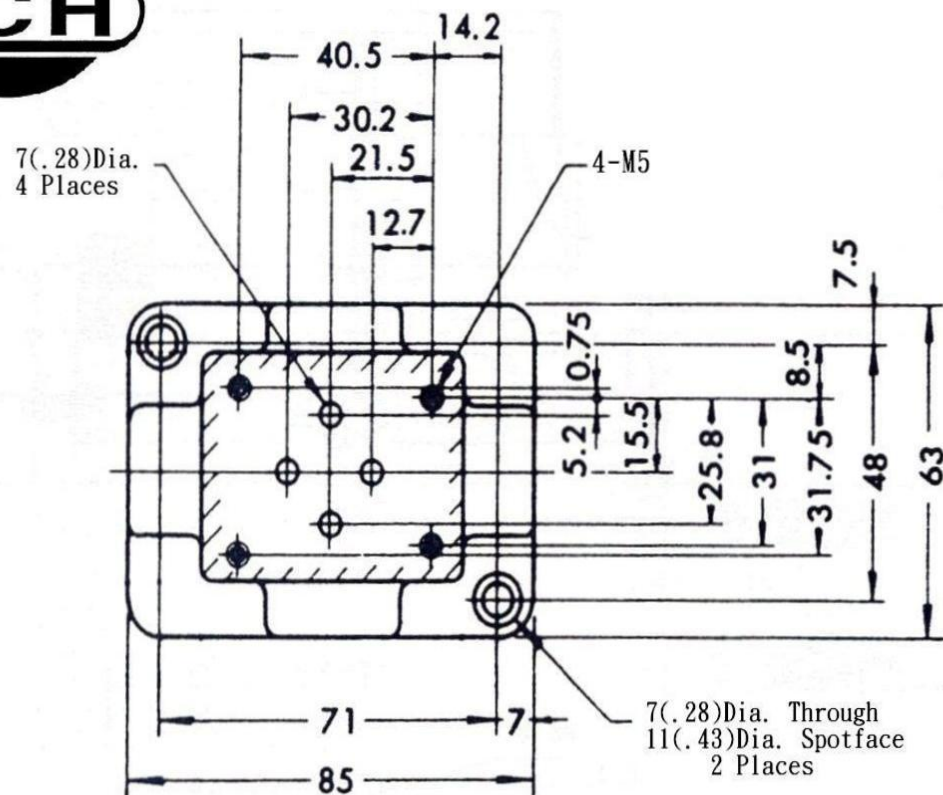

■附件：


●安裝螺栓：

| 型式號碼<br>Model | 螺絲尺寸 數量(pcs)<br>Description & Sizes Q'typ | 鎖緊扭矩kgf-m<br>Torque(kgf-m) |
|---------------|-------------------------------------------|----------------------------|
| DSG-02        | 內六角螺栓<br>Soc. Hex. Cap Bolt M5×45×4pcs    | 0.6 ~0.7                   |
| DSG-03        | 內六角螺栓<br>Soc. Hex. Cap Bolt M6×35×4pcs    | 1.2 ~1.5                   |



MODEL: DSGM-02  
單位:mm Unit:mm

# ■ 接線方式 / ELECTRICAL WIRING


## ● 接線盒型式 (帶燈)

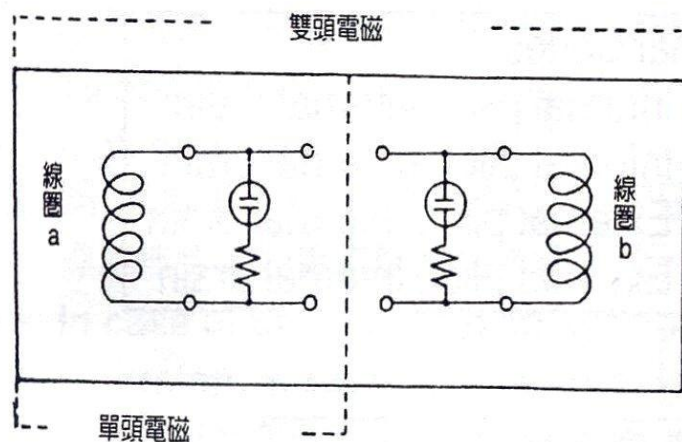



## ● DIN插頭式連接器 (帶燈、不帶燈二種)

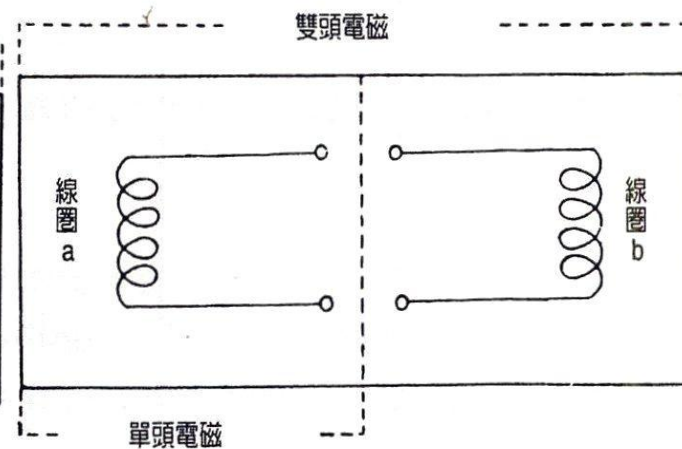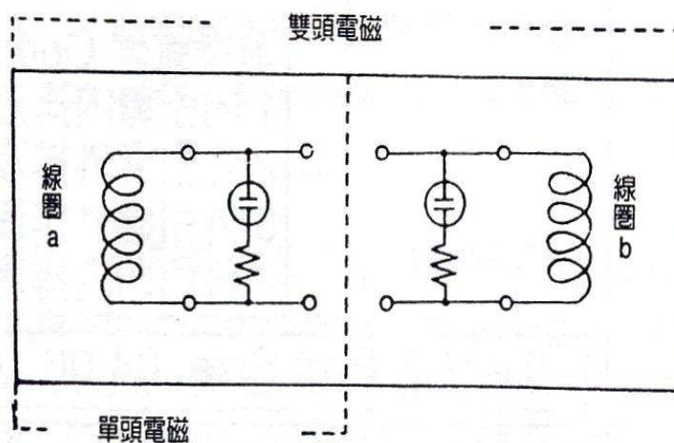

## ● DIN插頭式連接器 (帶LED燈)

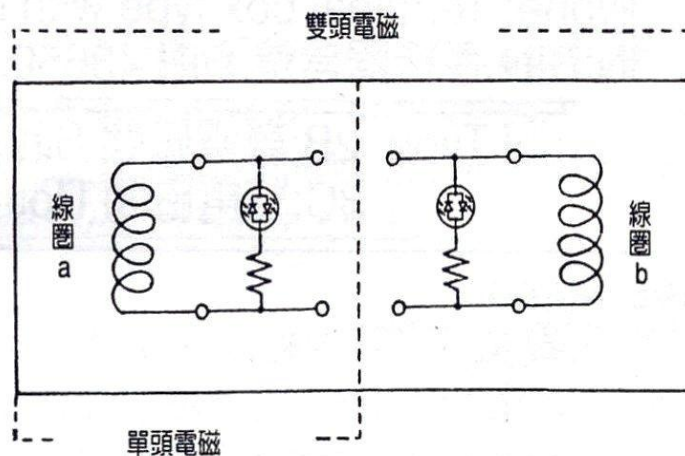


## ● ISO 4400規格

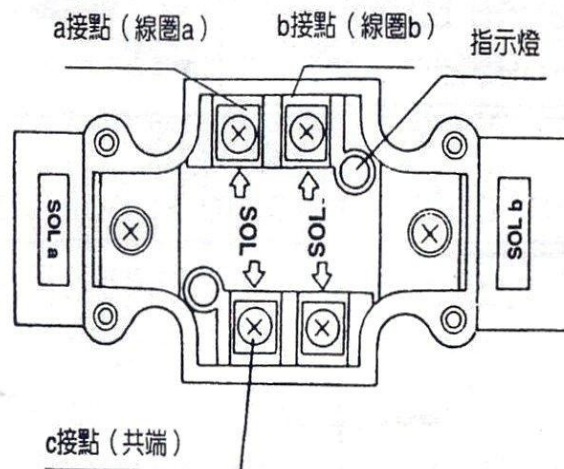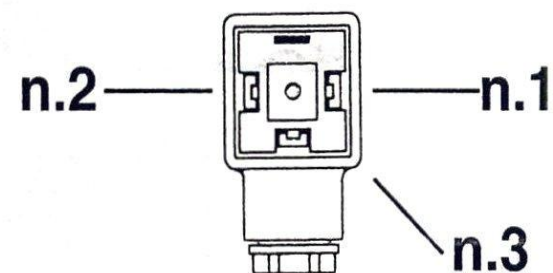



# 壓力降流量曲線/Pressure drop-flow characteristics

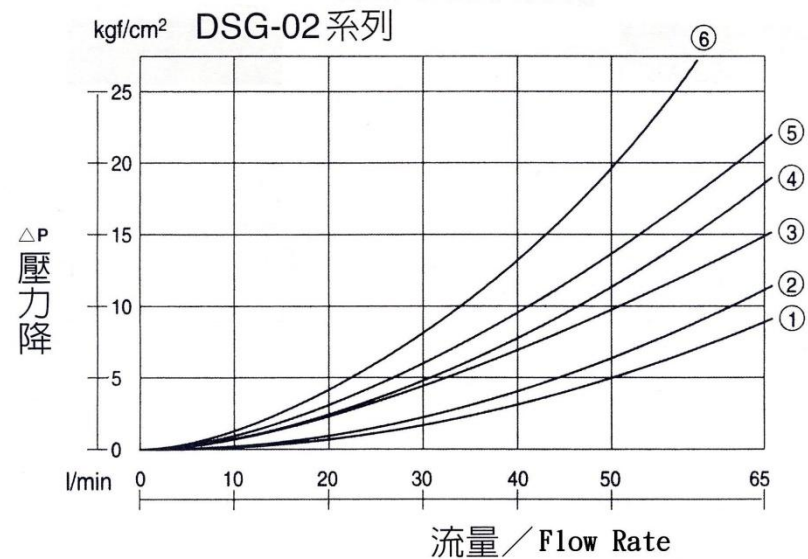

| 閥軸型式 | 壓力降曲線代號 Pressure Drop Curve No. |     |     |     |     |
|------|---------------------------------|-----|-----|-----|-----|
|      | P→A                             | P→B | A→T | B→T | P→T |
| 3C2  | ②                               | ②   | ②   | ②   | —   |
| 3C3  | ①                               | ①   | ①   | ①   | ③   |
| 3C4  | ②                               | ②   | ①   | ①   | —   |
| 3C5  | ⑤                               | ⑤   | ⑤   | ⑤   | ③   |
| 3C6  | ⑥                               | ⑥   | ⑥   | ⑥   | ③   |
| 3C10 | ②                               | ②   | ②   | ①   | —   |
| 2D2  | ②                               | ②   | ②   | ②   | —   |
| 2D3  | ②                               | ②   | ④   | ④   | —   |
| 2B2  | ③                               | ③   | ②   | ②   | —   |
| 2B3  | ④                               | ②   | ②   | ④   | —   |

## ■參考粘度 Viscosity:

| Viscosity | cSt | 15   | 20   | 30   | 40   | 50   | 60   | 70   | 80   | 90   | 100  |
|-----------|-----|------|------|------|------|------|------|------|------|------|------|
|           | SSU | 77   | 98   | 141  | 186  | 232  | 278  | 324  | 371  | 417  | 464  |
| Factor    |     | 0.81 | 0.87 | 0.96 | 1.03 | 1.09 | 1.14 | 1.19 | 1.23 | 1.27 | 1.30 |

ΔP' = ΔP(G'/0.85) 不同比重(G') 產生不同之壓力降(ΔP')

測試條件 Test Conditions :  
 壓力 pressure : 70kgf/cm<sup>2</sup> (1000psi)  
 油黏度 Viscosity : 20cSt  
 油溫 Temperature : 50°C  
 油 Fluid : ISO-VG 32